


I.D.	O.D.	LENGTH	PART #	LBS. PRESSURE 1/8" DEFLECTION	EACH NET PRICE
3/16	13/16	1	HU 1893-100	775	
		1 1/4	HU 1893-125	650	
		1 1/2	HU 1893-150	525	
		25	HUT 1893		
1/4	1	1	HU 2510-100	700	
		1 1/4	HU 2510-125	550	
		1 1/2	HU 2510-150	400	
		1 3/4	HU 2510-175	350	
		25	HUT 2510		
5/16	1 1/8	1	HU 3111-100	800	
		1 1/4	HU 3111-125	600	
		1 1/2	HU 3111-150	575	
		1 3/4	HU 3111-175	525	
		2	HU 3111-200	475	
		25	HUT 3111		
3/8	1 1/8	1	HU 3711-100	800	
		1 1/4	HU 3711-125	600	
		1 1/2	HU 3711-150	525	
		1 3/4	HU 3711-175	475	
		2	HU 3711-200	425	
		2 1/4	HU 3711-225	375	
		2 1/2	HU 3711-250	325	
		25	HUT 3711		
1/2	1 1/4	1	HU 5012-100	875	
		1 1/4	HU 5012-125	700	
		1 1/2	HU 5012-150	550	
		1 3/4	HU 5012-175	500	
		2	HU 5012-200	475	
		2 1/4	HU 5012-225	450	
		2 1/2	HU 5012-250	400	
		25	HUT 5012		
5/8	1 3/8	1	HU 6213-100	900	
		1 1/4	HU 6213-125	825	
		1 1/2	HU 6213-150	750	
		1 3/4	HU 6213-175	550	
		2	HU 6213-200	500	
		2 1/4	HU 6213-225	450	
		2 1/2	HU 6213-250	425	
		25	HUT 6213		
3/4	1 3/4	1 1/4	HU 7517-125	1400	
		1 1/2	HU 7517-150	1200	
		1 3/4	HU 7517-175	1000	
		2	HU 7517-200	900	
		2 1/4	HU 7517-225	800	
		2 1/2	HU 7517-250	700	
		2 3/4	HU 7517-275	650	
		3	HU 7517-300	600	
		25	HUT 7517		
		7/8	2	1 1/4	HU 8720-125
1 1/2	HU 8720-150			1300	
1 3/4	HU 8720-175			1150	
2	HU 8720-200			1000	
2 1/4	HU 8720-225			900	
2 1/2	HU 8720-250			800	
2 3/4	HU 8720-275			700	
3	HU 8720-300			600	
25	HUT 8720				
1	2 1/2	1 1/4	HU 1025-125	2600	
		1 1/2	HU 1025-150	2400	
		1 3/4	HU 1025-175	2250	
		2	HU 1025-200	2000	
		2 1/4	HU 1025-225	1800	
		2 1/2	HU 1025-250	1500	
		2 3/4	HU 1025-275	1200	
		3	HU 1025-300	1000	
		4	HU 1025-400	800	
		25	HUT 1025		
*1/4	2 1/2	25	MUT 1225		
*1/2	2 1/2	25	MUT 1525		

Call
for
Pricing

Heavy Pressure

POWERTHANE is available in 3 diameters for each I.D. listed - changing outside diameter changes pressure - the larger the mass deflected the higher the pressure.

Durometer hardness 95 Shore A.

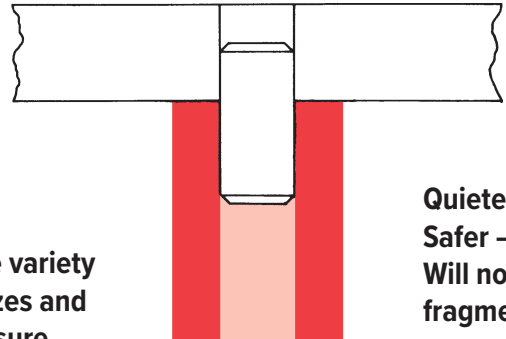

Quieter –
Safer –
Will not
fragmentize

Wide variety
of sizes and
pressure
available

Absorbs shock

POWERTHANE tubes are available without delay in 25" lengths – listed cut lengths – special cut lengths.

Pressure shown are as free standing when mounted wring fit pressures will be approximately 25% greater.

POWERTHANE highest pressures are available with shorter lengths, and greater mass, care should be used to avoid over deflection causing heat build up, shortening wear life.

Pressures are approximate, each additional 1/8" deflection increases pressure 60% up to maximum recommended deflections of 25%.



BROCHURE H322

® Registered T.M. of TOOL MATE CORPORATION
© 1981 TOOL MATE CORPORATION