

TOOL MATE CORPORATION

POWERTHANE[®] XTRA[™]

URETHANE TUBES & DIE SPRINGS

XTRA STRENGTH ~ XTRA PRESSURE

POWERTHANE[®]

is formulated from a select group of elastomers and is designed to meet the demands of the Tool, Die & Metal forming industries.

Standard hardness, **95-A durometer**, provides excellent load bearing and cut, abrasion, tear and wear resistance.

Tensile is **6800 P.S.I.**

Optimum deflection is **15%**

Maximum deflection is **25%**

Special sizes and durometers available, phone/fax for quote


**WE SHIP 98%
SAME DAY FROM
STOCK**

**ISO 9002:1994
COMPLIANT**

BROCHURE X607

PART #	ID	OD	LENGTH	PRICE
XHUT 2512	1/4	1 1/4	25"	Call for Pricing
XHUT 3113	5/16	1 3/8	25"	
XHUT 3712	3/8	1 1/4	25"	
XHUT 3715	3/8	1 1/2	25"	
XHUT 5015	1/2	1 1/2	25"	
XHUT 5017	1/2	1 3/4	25"	
XHUT 5020	1/2	2"	25"	
XHUT 6215	5/8	1 1/2	25"	
XHUT 6220	5/8	2"	25"	
XHUT 7520	3/4	2"	25"	
XHUT 7525	3/4	2 1/2	25"	
XHUT 8725	7/8	2 1/2	25"	
XHUT 8730	7/8	3"	25"	
XHUT 1030	1"	3"	25"	
XHUT 1035	1"	3 1/2	25"	

Prices listed are for standard hardness of 95 Shore A durometer.

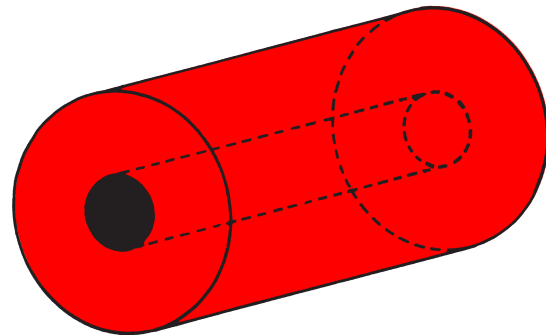

www.toolmatecorp.com



**PADS, RODS, BARS
AVAILABLE**



TOOL MATE CORP.

(513) 729-1160 FAX (513) 729-2636
P.O. BOX 53336 CINCINNATI, OHIO 45253