


CLEAR URETHANE

PUNCH STRIPPERS DIE SPRINGS

"U" Stripper/Springs are pure **uncolored 90 A durometer** urethane with 30% maximum deflection.

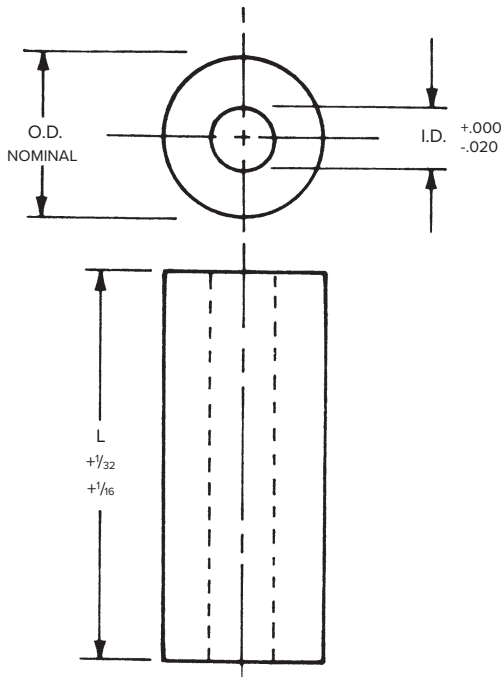

I.D.'s are wring fit for standard punches – dowels-stripper bolts etc.

Pressure shown are as free standing when mounted wring fit pressures will be approximately 25% greater.

Urethane deflects but does not compress, spacing consideration should allow for expansion equal to deflection.

Clear 90 A durometer urethane stripper/springs offer more travel (deflection) 30% maximum – visible quality check.

A PRODUCT OF TOOLMATE

PART #	LENGTH L	EACH NET PRICE	I.D.	O.D.	LOAD POUNDS TO DEFLECT			
					1/8	1/4	3/8	1/2
U 1	1 1/4	Call for Pricing	3/16	11/16	125	230	400	–
	1 1/2				120	225	390	–
	T 25				–	–	–	–
U 2	1 1/4		1/4	3/4	135	250	420	–
	1 1/2				120	240	380	–
	1 3/4				125	230	345	–
	2				115	215	300	–
	2 1/4				110	200	270	–
	T 25				–	–	–	–
U 3	1 1/4		5/16	13/16	160	300	500	–
	1 1/2				150	280	445	–
	1 3/4				140	260	390	–
	2	135			240	350	–	
	2 1/4	125			220	310	–	
	T 25	–			–	–	–	
U 4	1 1/4	3/8	7/8	170	320	510	–	
	1 1/2			160	310	475	–	
	1 3/4			150	290	440	–	
	2			140	260	390	–	
	2 1/4			130	225	350	–	
	T 25			–	–	–	–	
U 5	1 1/4	1/2	1	205	370	550	–	
	1 1/2			195	355	520	–	
	1 3/4			180	335	480	–	
	2			165	305	440	–	
	2 1/4			150	270	395	520	
	2 1/2			140	240	350	490	
	T 25			–	–	–	–	
U 6	1 1/4	5/8	1 1/8	240	420	610	–	
	1 1/2			235	410	600	–	
	1 3/4			230	400	590	–	
	2			225	390	575	–	
	2 1/4			220	375	550	790	
	2 1/2			205	360	525	760	
	T 25			–	–	–	–	
U 7	1 1/2	3/4	1 3/8	380	675	950	–	
	1 3/4			360	645	920	–	
	2			340	610	885	–	
	2 1/4			320	575	810	1150	
	2 1/2			275	525	735	1070	
	2 3/4			240	475	670	980	
	3			210	410	600	875	
	T 25			–	–	–	–	
U 8	1 1/2	7/8	1 5/8	480	870	1260	–	
	1 3/4			470	850	1240	–	
	2			450	825	1210	–	
	2 1/4			440	800	1175	1660	
	2 1/2			425	770	1120	1600	
	2 3/4			410	740	1075	1525	
	3			395	705	1025	1430	
	T 25			–	–	–	–	
U 9	1 1/2	1	1 3/4	570	980	1400	–	
	1 3/4			550	970	1385	–	
	2			530	955	1370	–	
	2 1/4			510	930	1345	1850	
	2 1/2			485	900	1315	1800	
	2 3/4			465	865	1275	1745	
	3			440	820	1235	1675	
	T 25			–	–	–	–	



Prices listed are for standard hardness of 90 Shore A durometer

BROCHURE U322

© Registered T.M. of TOOL MATE CORPORATION
© 1981 TOOL MATE CORPORATION



When ordering specify: **Quantity 8** **Part # U4** **Length 2 1/4**

TERMS: Net 30 Days
F.O.B. Shipping Point
Minimum Order \$25.00